


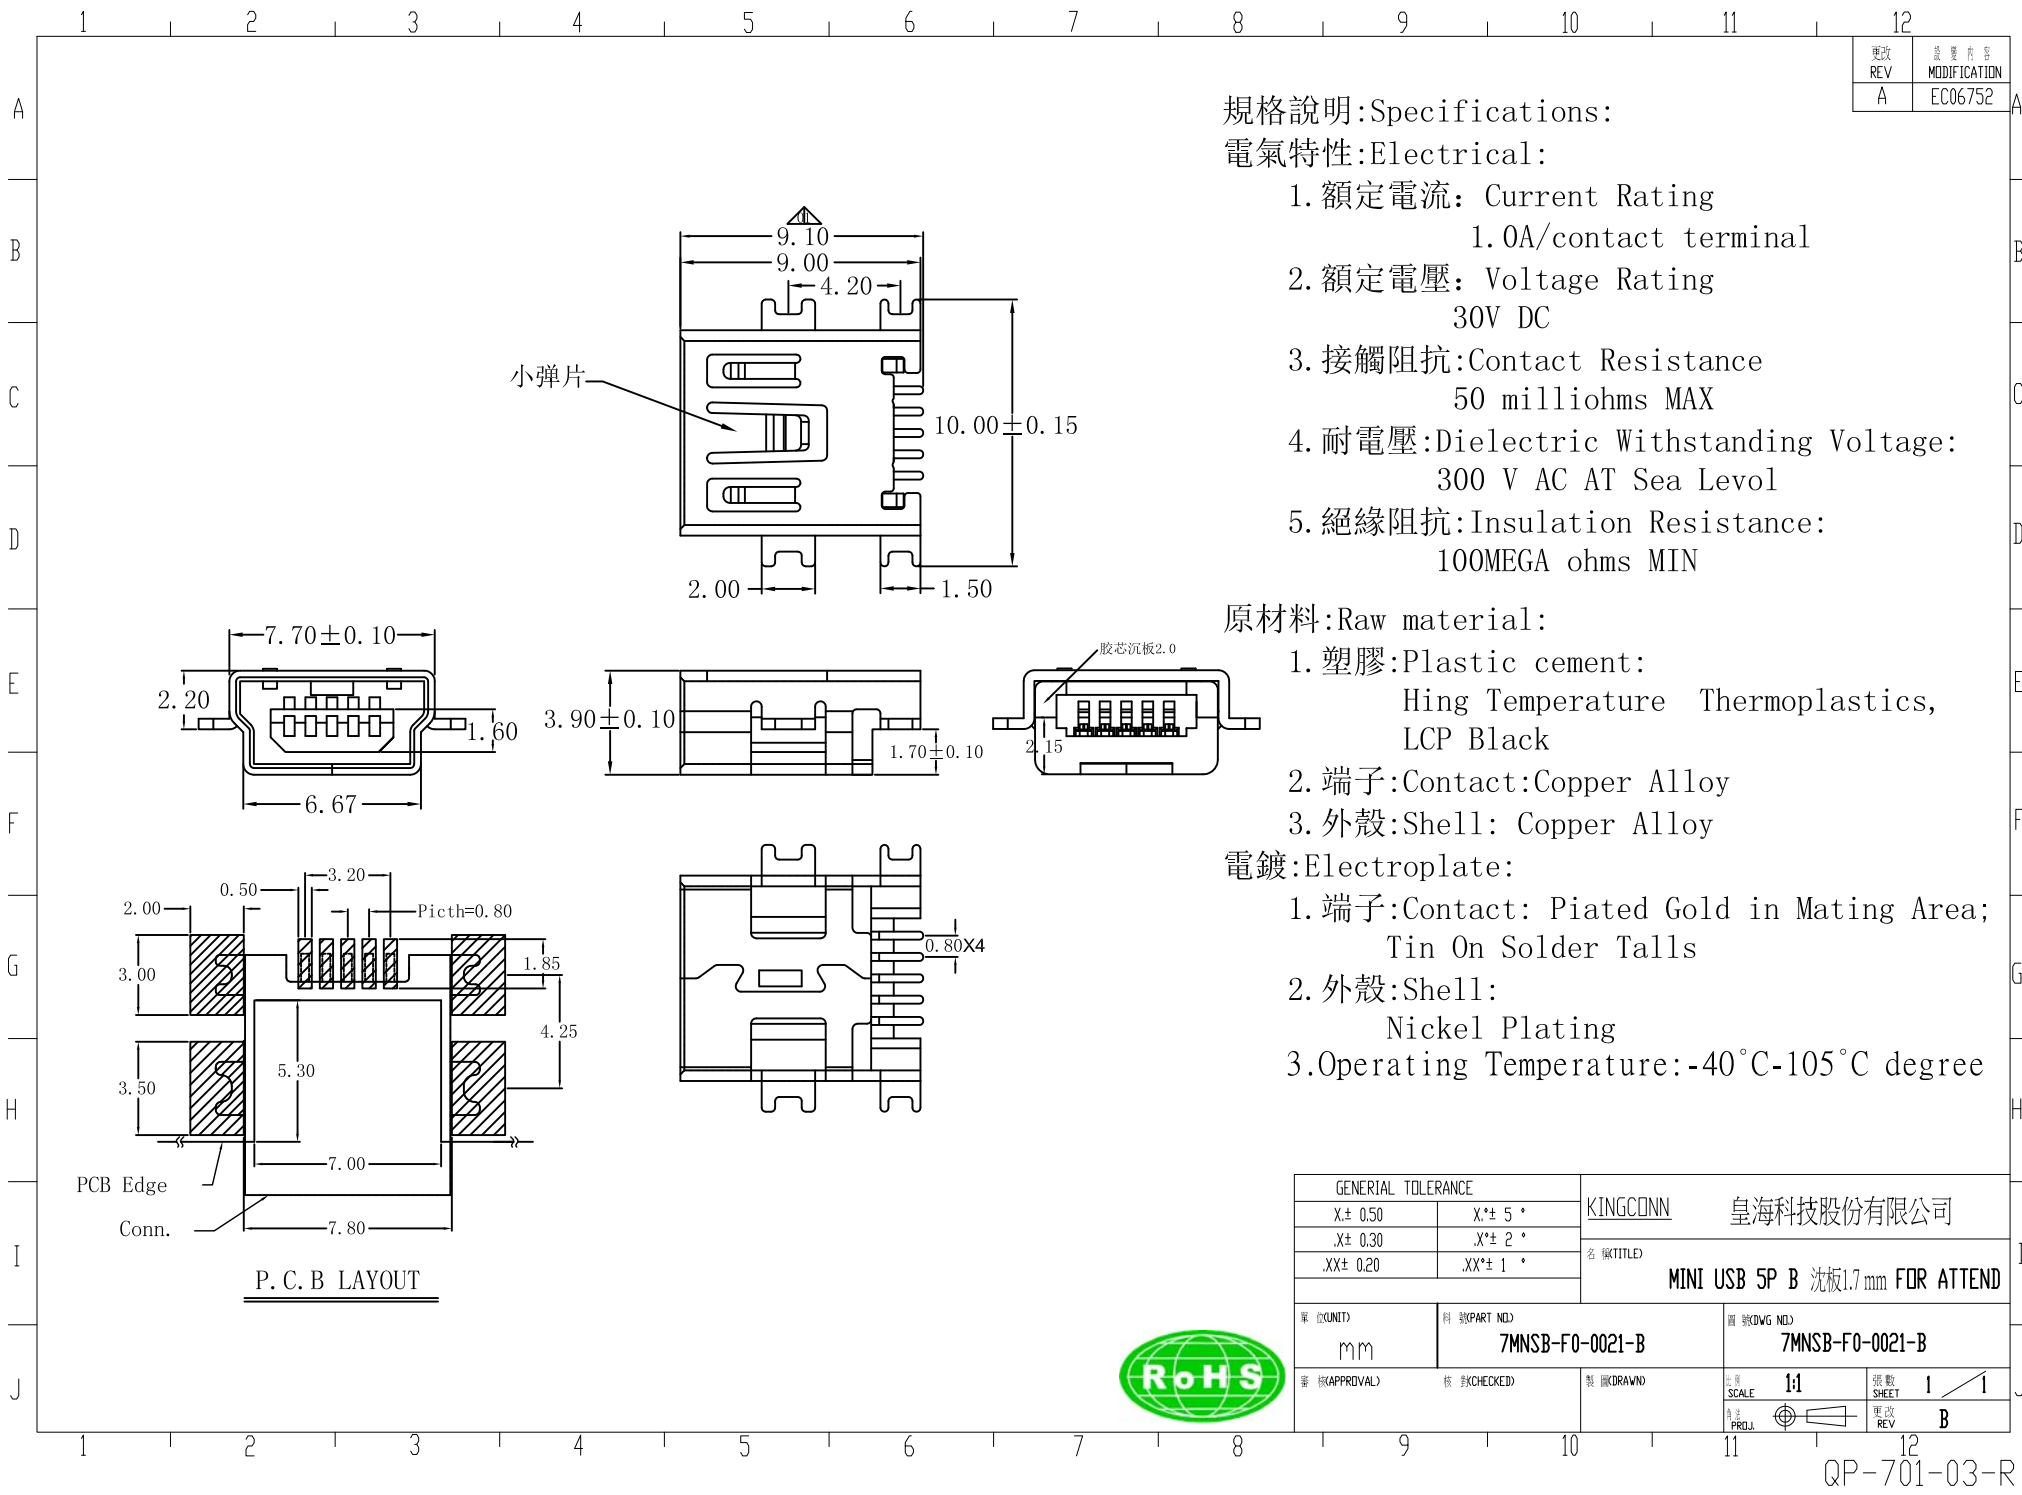

更改 REV	變更內容 MODIFICATION
A	EC06752

規格說明:Specifications:

電氣特性:Electrical:

- 1. 額定電流: Current Rating
1.0A/contact terminal
- 2. 額定電壓: Voltage Rating
30V DC
- 3. 接觸阻抗:Contact Resistance
50 milliohms MAX
- 4. 耐電壓:Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 5. 絕緣阻抗:Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:

- 1. 塑膠:Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
- 2. 端子:Contact:Copper Alloy
- 3. 外殼:Shell: Copper Alloy

電鍍:Electroplate:

- 1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2. 外殼:Shell:
Nickel Plating
- 3.Operating Temperature:-40°C-105°C degree

P. C. B LAYOUT



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLED) MINI USB 5P B 沈板1.7mm FOR ATTEND	
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT) mm	料 號(PART NO) 7MNSB-F0-0021-B	圖 號(DWG NO) 7MNSB-F0-0021-B	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1 圖 號 SHEET 1 / 1 更 改 REV B