

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0.

Contact: Copper Alloy

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :12V AC/DC

Ambient Temperature Range : -20°C~+60°C

Storage Temperature Range : -40°C~+70°C


Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100mΩ max.

Insulation Resistance:1000M min./500VDC

Mating Cycles:5,000 Insertions

Usable Memory Card: SD&MMC Card

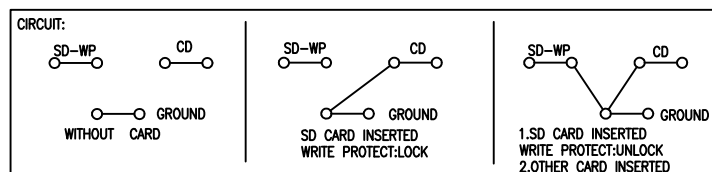

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
—
I
—
J



H
—
I

 prohibited layout area