

更改 REV	變更內容 MODIFICATION
A	ECXXXX


SPECIFICATIONS
 1.CURRENT RATING: 1.0A
 2.VOLTAGE RATING 240VAC
 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
 4.OPERATING HUMIDITY RANGE:90% TO 95%.
 5.WITHSTANDING VOLTAGE:700V AC/MINUTE.

7BTBF-F0-XX2127BXX-XX

TABLE 2:ROWS
(04/05.../14)

TABLE 1:HEIGHT
(50/60/65/75)

TABLE 3:POSITION
(10/15/.../50)

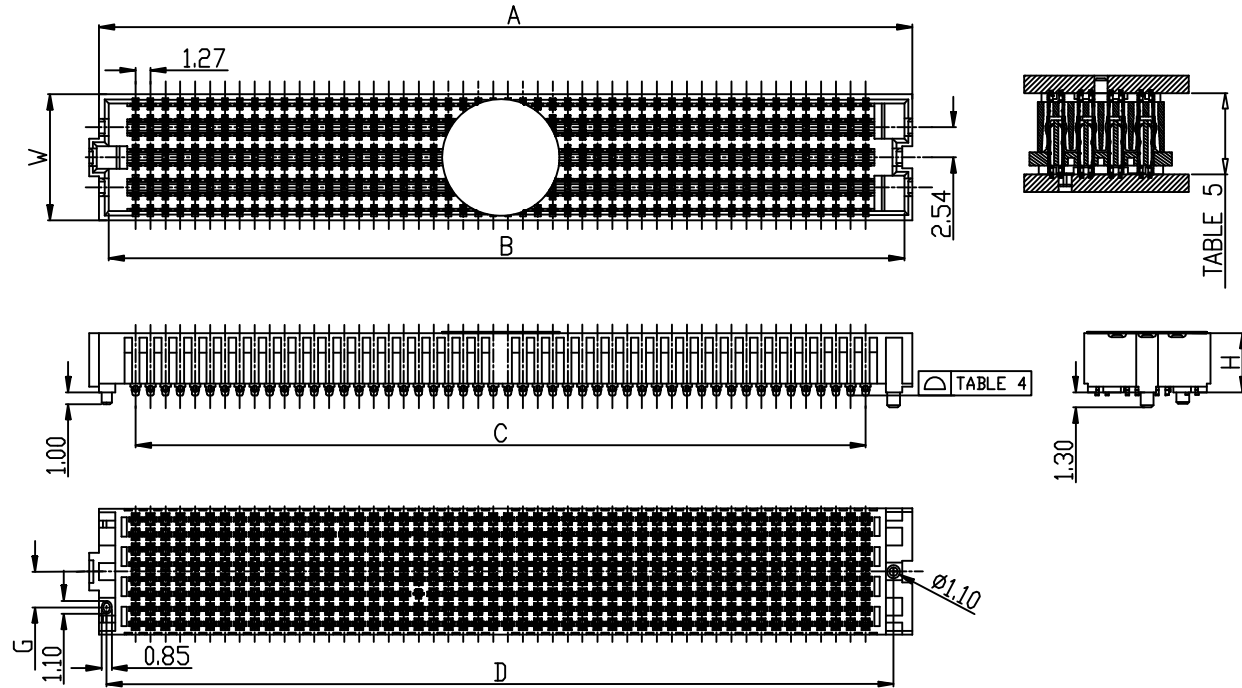


HEIGHT	H
5.0	5.05
6.0	6.05
6.5	6.55
7.5	7.54

ROWS	W	G
04	5.66	2.01
05 06	8.20	3.05
08	10.74	3.05
10	13.28	3.05
12	15.82	3.05
14	18.36	3.05


POSITION	A	B	C	D
10	18.52	17.02	11.43	16.28
15	24.87	23.37	17.78	22.63
19	29.95	28.45	22.86	27.71
20	31.22	29.72	24.13	28.98
25	37.57	36.07	30.13	35.33
30	43.92	42.42	36.83	41.68
40	56.62	55.12	49.53	54.38
50	69.32	67.82	62.23	67.08

POSITION	COPLANARITY
10 PIN	0.15
30 PIN	0.20
40 PIN	0.23
50 PIN	0.23

	5.05	6.05	6.55	7.54
4.72	7.00	8.00	8.50	9.50
5.72	8.00	9.00	9.50	10.50
6.22	8.50	9.50	10.00	11.00
8.23	NA	NA	12.00	NA
9.27	11.50	12.50	13.00	14.00
9.70	12.00	13.00	13.50	14.50
11.71	14.00	15.00	15.50	16.50
13.72	16.00	17.00	17.50	18.50

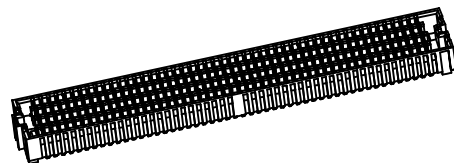

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X*± 5°	
.X± 0.30	.X*± 2°	
.XX± 0.20	.XX*± 1°	名廠(TITLE) PH:1.27mm Socket
單位(UNIT) mm	料號(PART NO) 7BTBF-F0-XX2127BXX-XX	圖號(DWG NO) 7BTBF-F0-XX2127BXX-XX
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)
		比例(SCALE) 1:1
		張數(SHEET) 1/2
		更改(REV) A

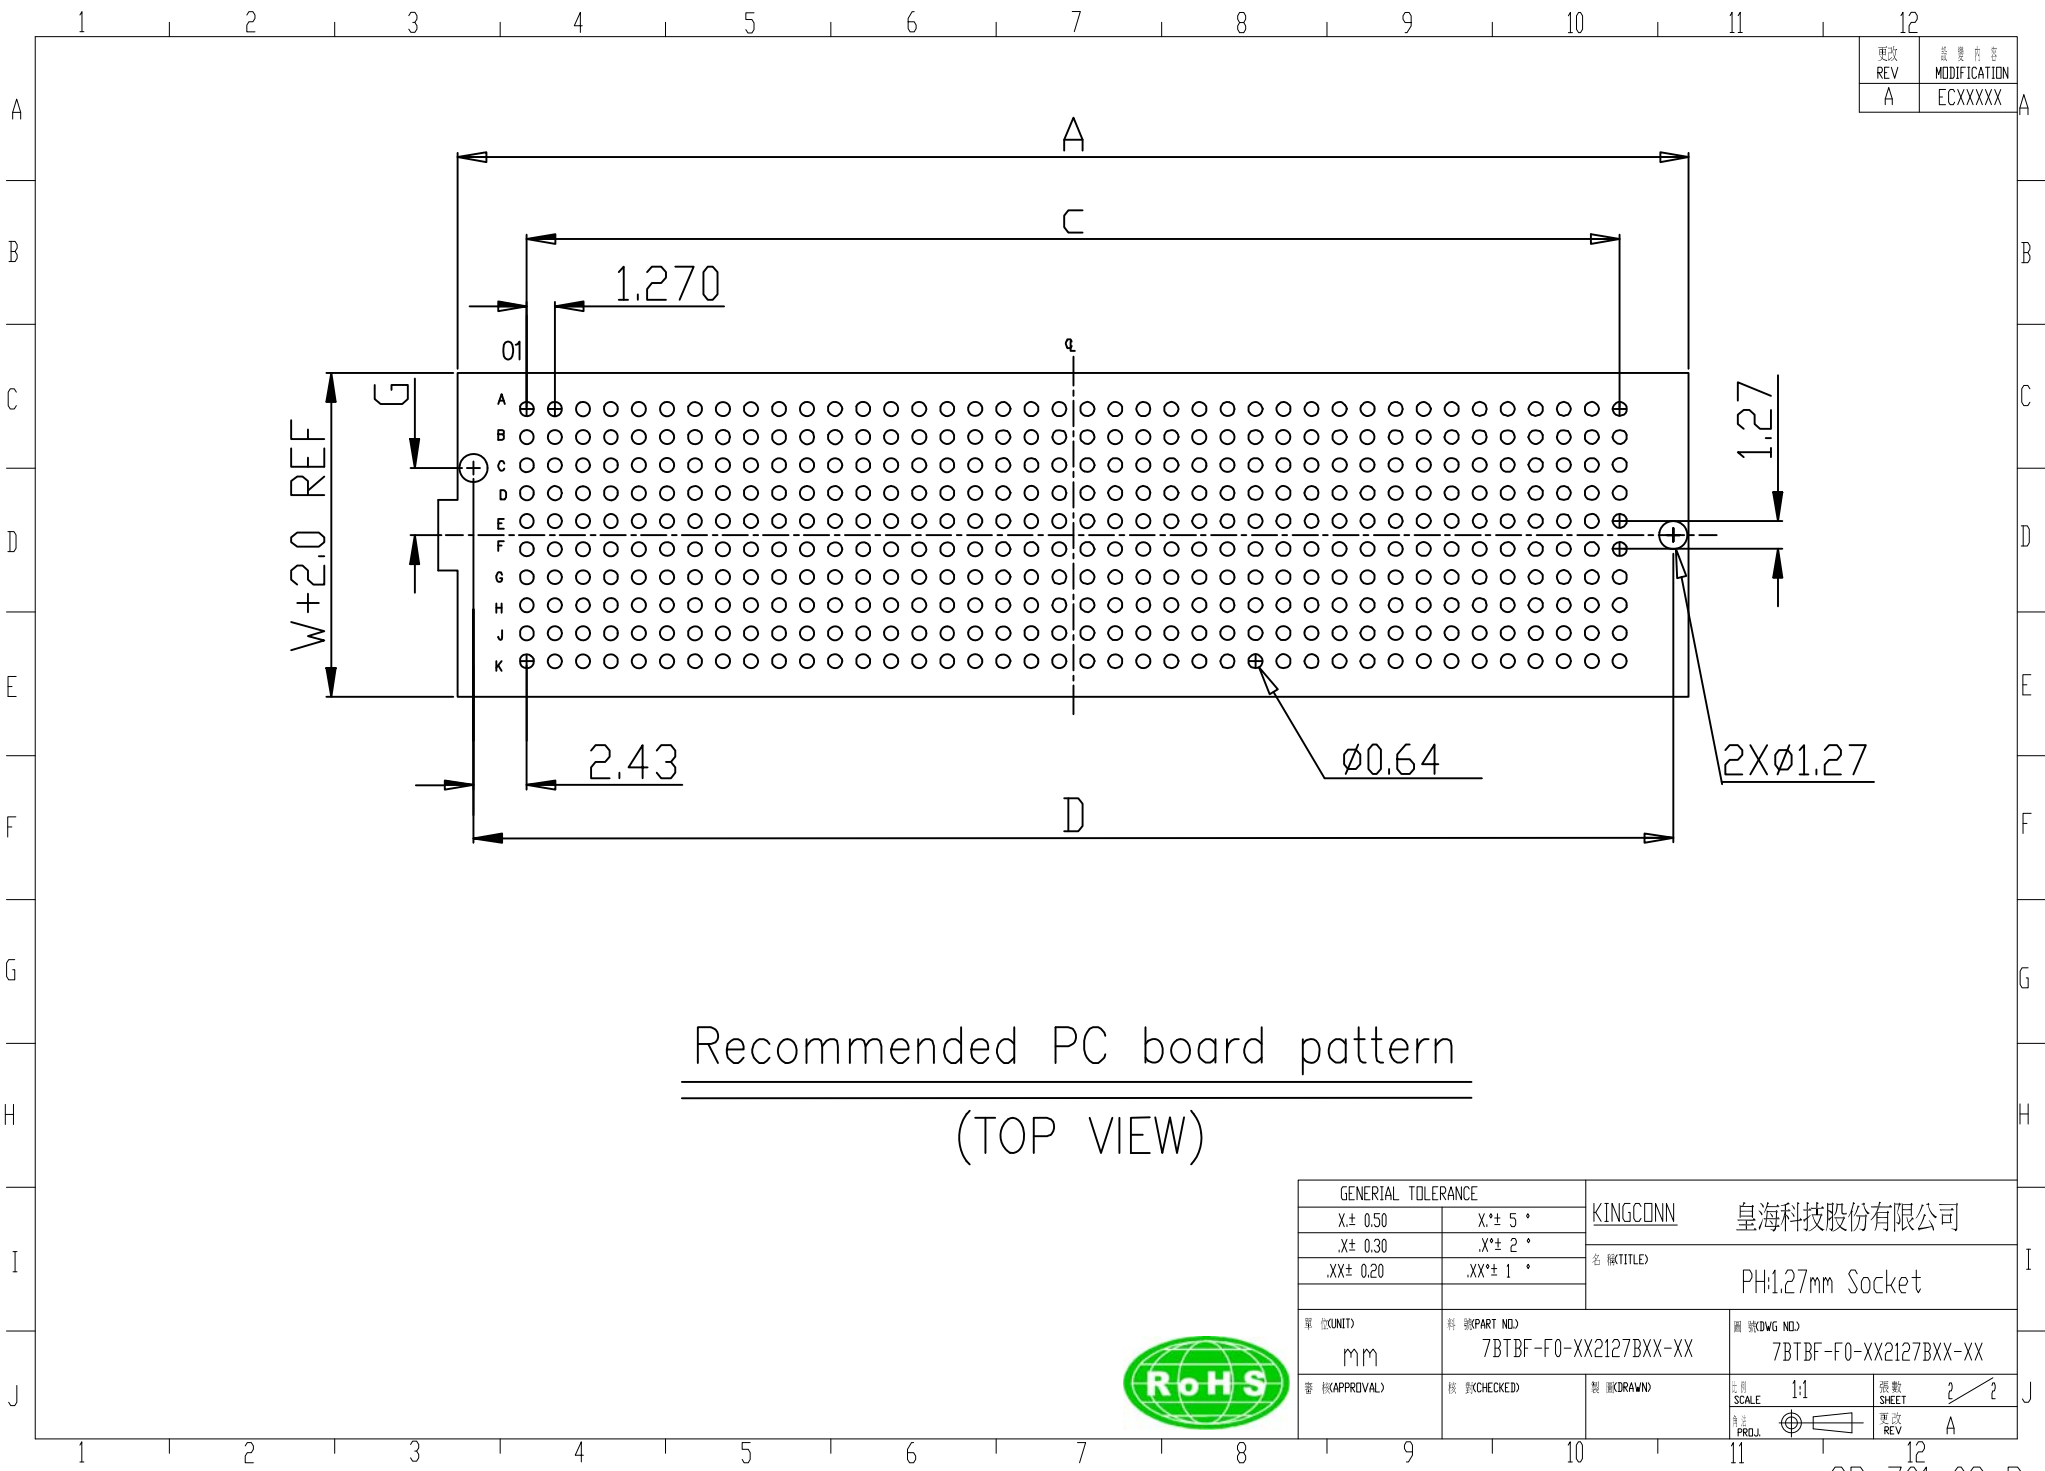

更改 REV	变更内容 MODIFICATION
A	ECXXXXX

Recommended PC board pattern
(TOP VIEW)

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X°± 5°	
.X± 0.30	.X°± 2°	
.XX± 0.20	.XX°± 1°	
名 稱(TITLE)		PH:1.27mm Socket
單位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)
mm	7BTBF-F0-XX2127BXX-XX	7BTBF-F0-XX2127BXX-XX
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)
		SCALE 1:1
		張數 SHEET 2/2
		更改 REV A

