

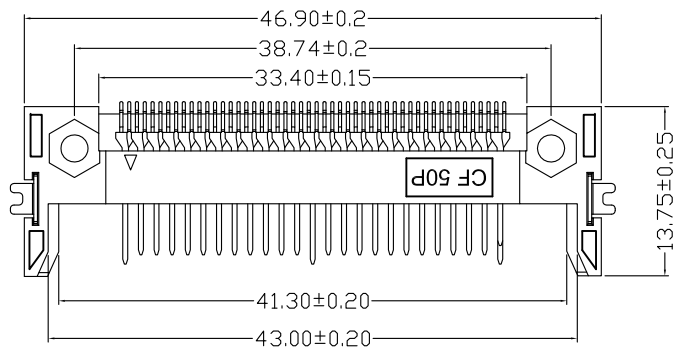
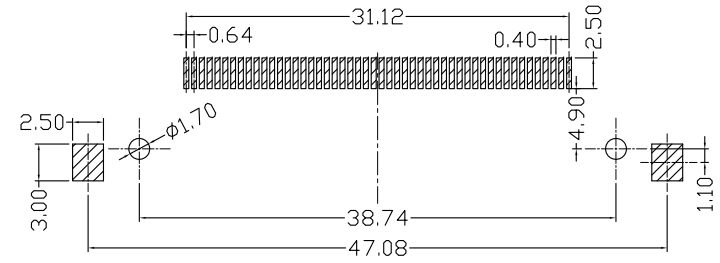



更改 REV	数量 MODIFICATION
A	ECXXXX

Recommended P.C.B Layout(Top Side)



NOTES:  
 Current Rating: 0.5A AC,DC  
 Temperature Range: -20°C~+60°C  
 Contact Resistance: 40mΩ max  
 Insulation Resistance: 1000MΩ min  
 Withstanding Voltage: 500V AC/minute  
 Material: LCP UL 94V-0

Dimension "C"
38.74
40.16

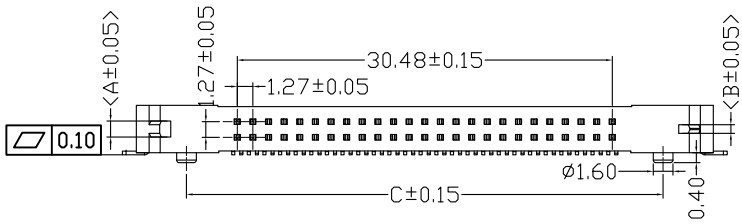

料号	品名	DIM.A	DIM.B
7CFHD-F9-0007	CF CARD 板上臂长13.75	1.35	0.70
7CFHD-F9-0107	CF CARD 板下臂长13.75	0.70	1.35



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X*± 5°	
.X± 0.30	.X*± 2°	
.XX± 0.20	.XX*± 1°	名 称(TITLE) CF CARD 臂长13.75 成品
单 位(UNIT) mm	料 号(PART NO.) 7CFHD-F9-0X07	图 号(DWG NO.) 7CFHD-F9-0X07-A
核 对(CHECKED)	製 图(DRAWN)	比 例 SCALE 1:1
		张 数 SHEET 1 / 1
		更 改 REV A