

更改 REV	變更內容 MODIFICATION
A	ECXXXXX

MICRO-USB-5PIN SOLDER TAIL

焊線式

特性：Specifications

電器 Electrical:

接觸阻抗：Contact Resistance
30milliohms MAX

耐電壓：Dielectric Withstanding Voltage
50V AC AT sea Levl

絕緣阻抗：Insulation Resistance:
100MEGA ohms MIN

材料：Matorial:

塑膠：Housing:Hing Temperature Thermoplastics,
UL 94V-0LCP料耐高溫塑膠和

端子：Contact:C2680

外殼：copper: 不鏽鋼殼。


電鍍：Fini

端子：Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Tails

接觸點鍍金0.5u，腳鍍錫

外殼：Shell:

Tin/Lead Piating 鍍鎳

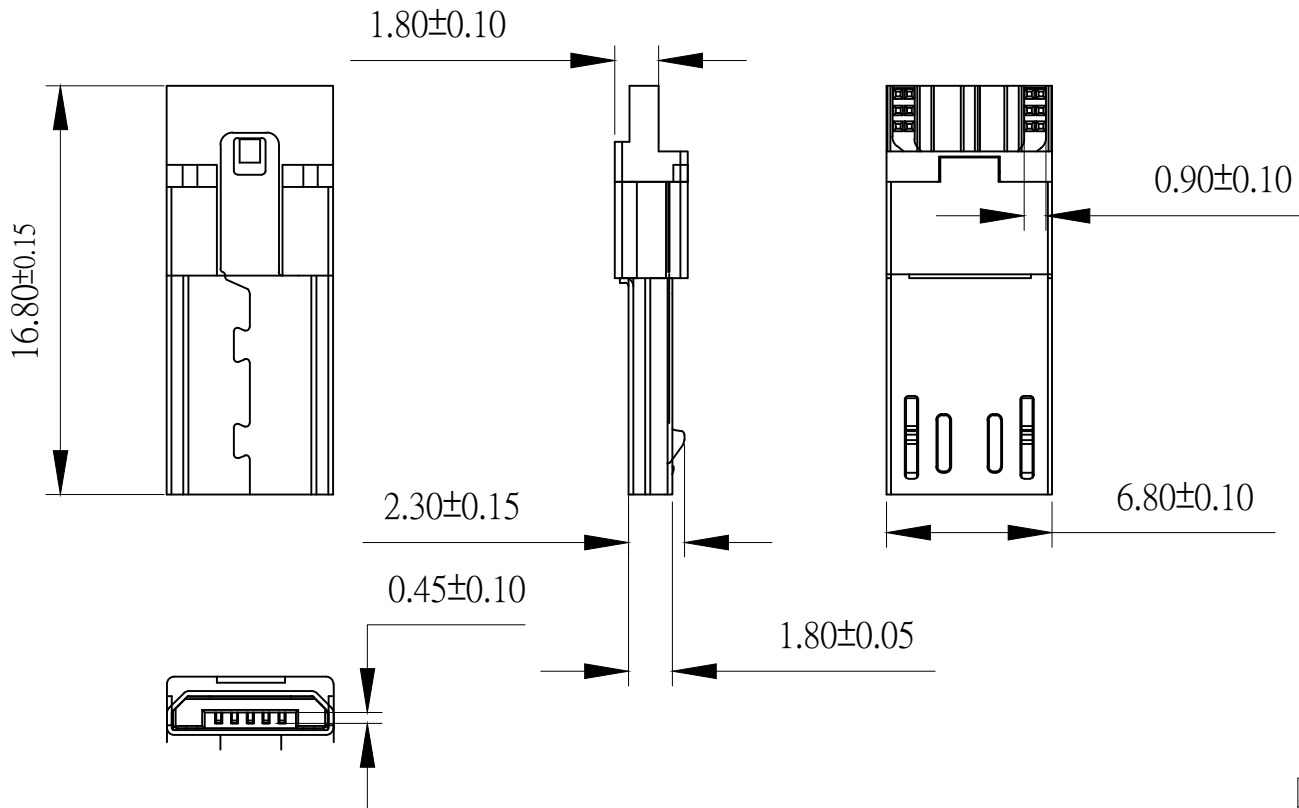

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X ± 0.50	X* ± 5°	名稱(TITLE) MICRO USB 5P/F	
.X ± 0.30	.X* ± 2°		
.XX ± 0.20	.XX* ± 1°		
單位(UNIT) mm	料號(PART NO.) 7MCUB-F0-0026	圖號(DWG NO.) 7MCUB-F0-0026	比例(SCALE) 1:1
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	張數(SHEET) 1 / 1
			更改(REV) A