


更改 REV	變更內容 MODIFICATION
A	ECXXXXX









NOTES:

MATERIALS

- HOUSING:
HI-TEMP.PLASTIC UL 94V-0 BLACK
- CONTACT:
COPPER ALLOY,T=0.15mm
GOLD PLATED ON CONTACT AREA
GOLD FLASH PLATED ON SOLDER TAILS UNDER NICKEL PLATED
- SHELL:
STAINLESS STEEL T=0.3mm
MATTE TIN PLATING OVERALL UNDER NICKEL PLATED

SPECIFICATIONS

- VOLTAGE RATING:30V AC
- CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A(FOR TERMINAL NO.2,3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A(FOR TERMINAL NO.1 AND 5)
0.5A(FOR TERMINAL NO.2,3 AND 4)
- INSULATION RESISTANCE:100M MINIAT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- CONTACT RESISTANCE:30m MAX.
- OPERATING TEMPERATURE:-30 TO +80?

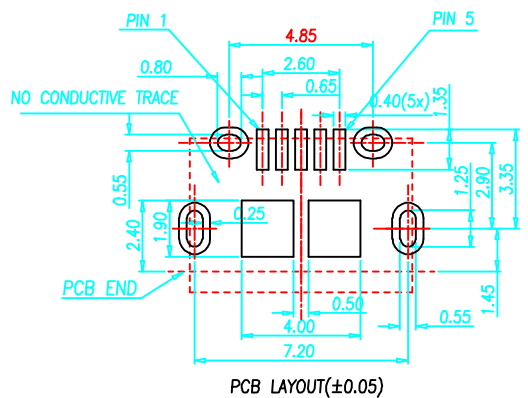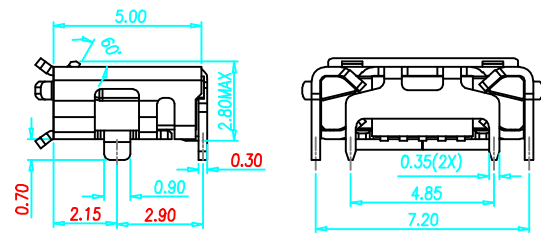

PCB LAYOUT(±0.05)



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X*± 5°	
.X± 0.30	.X*± 2°	
.XX± 0.20	.XX*± 1°	名稱(TITLE) MICRO USB 5PIN RECEPTACLE DIP
單位(UNIT) mm	料號(PART NO.) 7MCUB-FA-0011	圖號(DWG NO.) 7MCUB-FA-0011-B
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)
		比例(SCALE) 1:1
		張數(SHEET) 1/1
		更改(REV) B