


|           |                      |
|-----------|----------------------|
| 更改<br>REV | 修改内容<br>MODIFICATION |
| A         | ECXXXXX              |

### Recommended P.C.B Layout(Top Side)

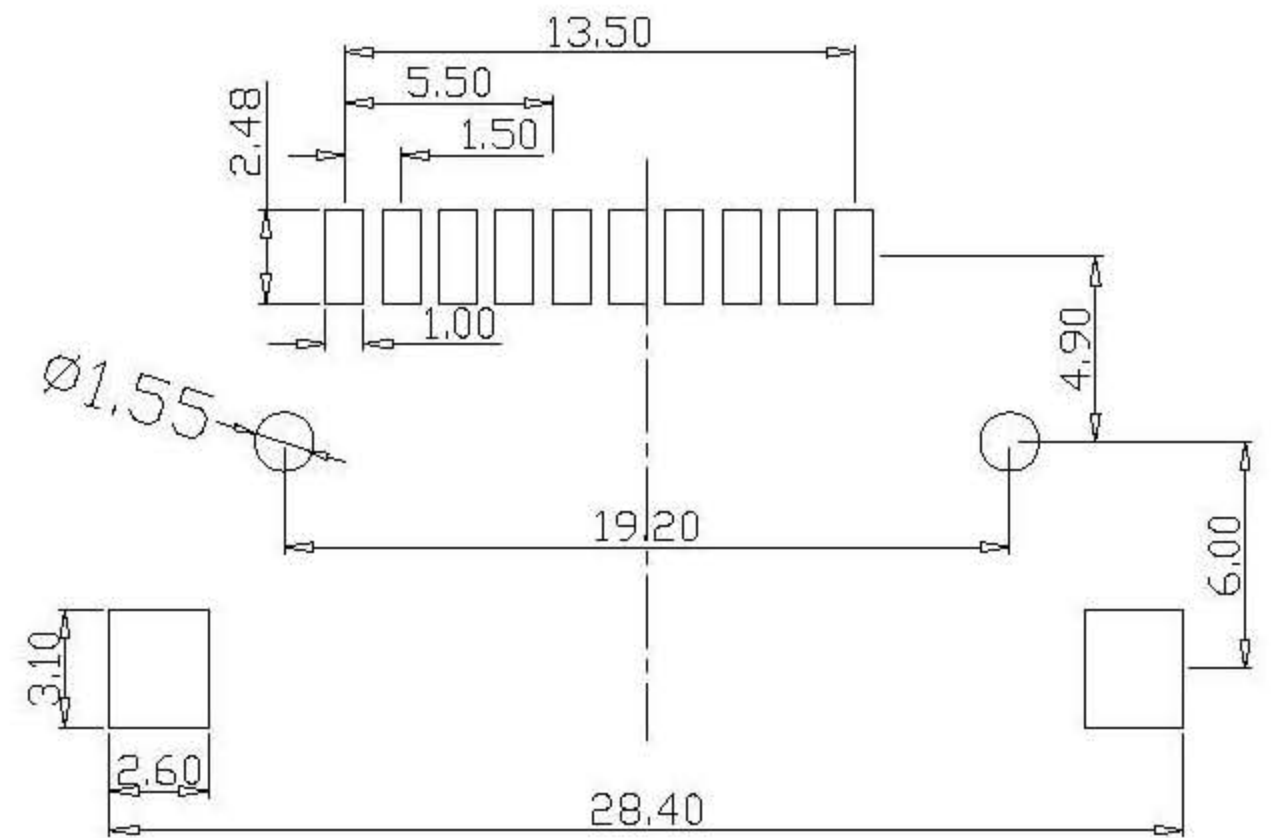

#### NOTES:

Current Rating: 0.5A AC,DC  
 Temperature Range: -20°C~+60°C  
 Contact Resistance: 40mΩ max  
 Insulation Resistance: 1000MΩ min  
 Withstanding Voltage: 500V  
 AC/minute  
 Material: LCP UL 94V-0

7MSMS-FX-0017

A:白  
 O:黑



|                   |                               |                              |  |
|-------------------|-------------------------------|------------------------------|--|
| GENERAL TOLERANCE |                               | KINGCONN 皇海科技股份有限公司          |  |
| X± 0.50           | X*± 5°                        | 名称(TITLE)<br>MS 全塑短型192板下卡座  |  |
| .X± 0.30          | .X*± 2°                       |                              |  |
| .XX± 0.20         | .XX*± 1°                      |                              |  |
| 单位(UNIT)<br>mm    | 料号(PART NO.)<br>7MSMS-FX-0017 | 图号(DWG NO.)<br>7MSMS-FX-0017 |  |
| 审核(APPROVAL)      | 检查(CHECKED)                   | 制图(DRAWN)                    | 比例(SCALE)<br>1:1<br>张数(SHEET)<br>1/1<br>更改(REV)<br>A |