更改 REV	說明內容 MODIFICATION
A	ECXXXXX

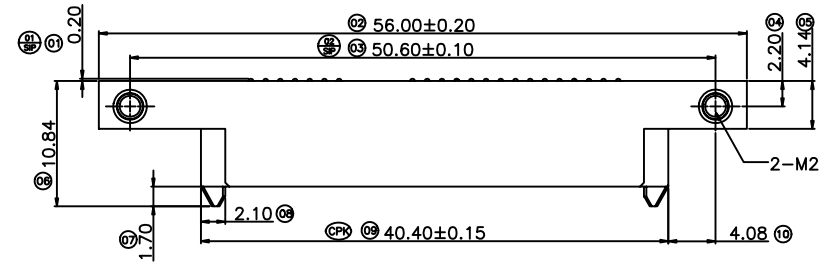



NOTES.

1. ELECTRICAL
   1.1 CURRENT RATING: 1.5A PER PIN MAX.
   1.2 INSULATION RESISTANCE: 1000M OHM MIN.
   1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC.
2. MATERIALS
2.1 HOUSING/CAP: HIGH TEMPERATURE POLYESTER,UL 94V-0. BLACK
2.2 TERMINAL: COPPER ALLOY.
3.3 NUT :METAL
3. UNLESS OTHERWISE SPECIFIED TOLERANCE:AS SHOW AS GENERAL TOLERANCE
4. MATING FORCE:20N MAX.
5. UN-MATING FORCE:4N MIN.
6. LIFE TEST:500CYCLES.
7. ENVIRONMENTAL:OPERATION TEMPERATURE:-30C°~+85C°

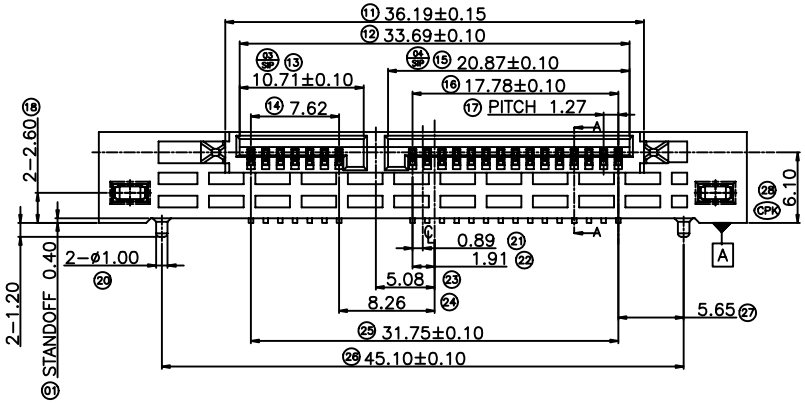



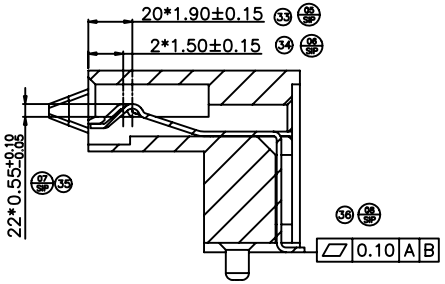

SECTION:A-A(2:1)

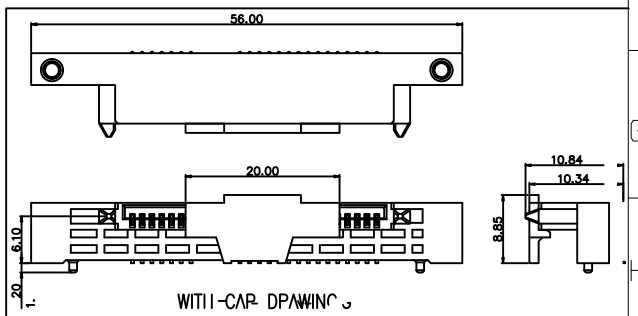

WITH-CAP DRAWING

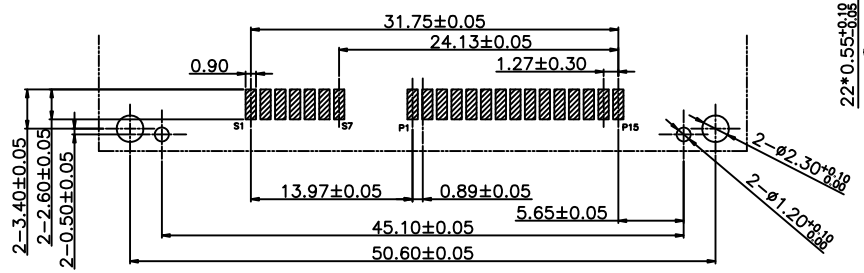

RECOMMENDED P.C.B LAYOUT (COMPONET SIDE)
P.C.B THICKNESS=1.20mm (TOLERANCE=±0.05)

GENERIAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X.± 0.50	X.°± 5 °	名稱(TITLE) SATA7+15PIN FEMALE CH6.1	
.X± 0.30	.X°± 2 °		
.XX± 0.20	.XX°± 1 °		
單位(UNIT) mm	料號(PART NO.) 7SATA-F0-1009	圖號(DWG NO.) 7SATA-F0-1009	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 / 張數 SHEET 1/1 / 投影 PROJ. / 更改 REV A

RoHS

QP-701-03-R