
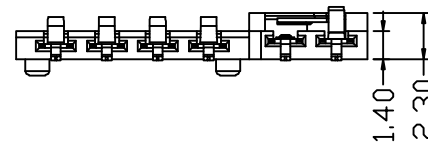


更改 REV	變更內容 MODIFICATION
A	EC07184
B	EC12709

Recommended P.C.B Layout(Top Side)

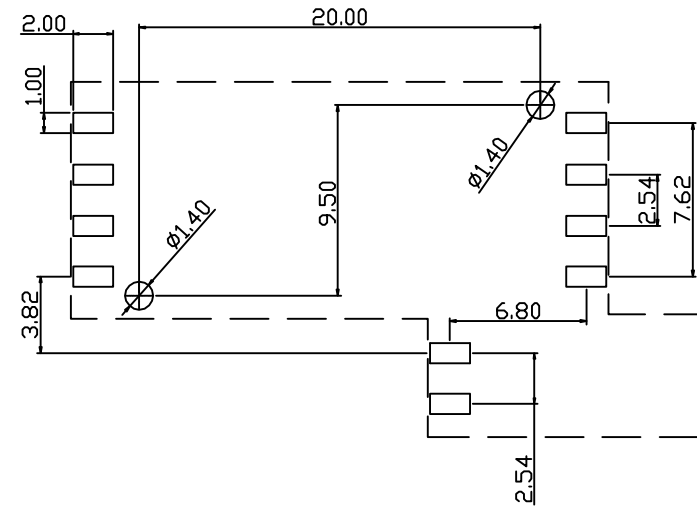

SIMM Card Connector, With

Physical:

Housing: LCP(NY 9T) UL 94V-0

Contact: Phosphor Bronze, Gold plated 1U" Tin plated 30U"

Specifications:



Voltage Current rating: 1A, 50V AC

Insulation Resistance: 1000Mohm Min

Contact Withstanding Voltage:

AC 500V For 1 Minute

Temperture Rating: -40° To +85°

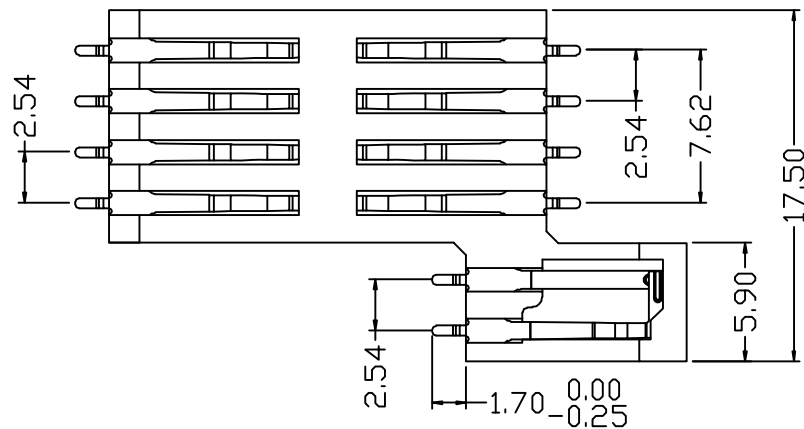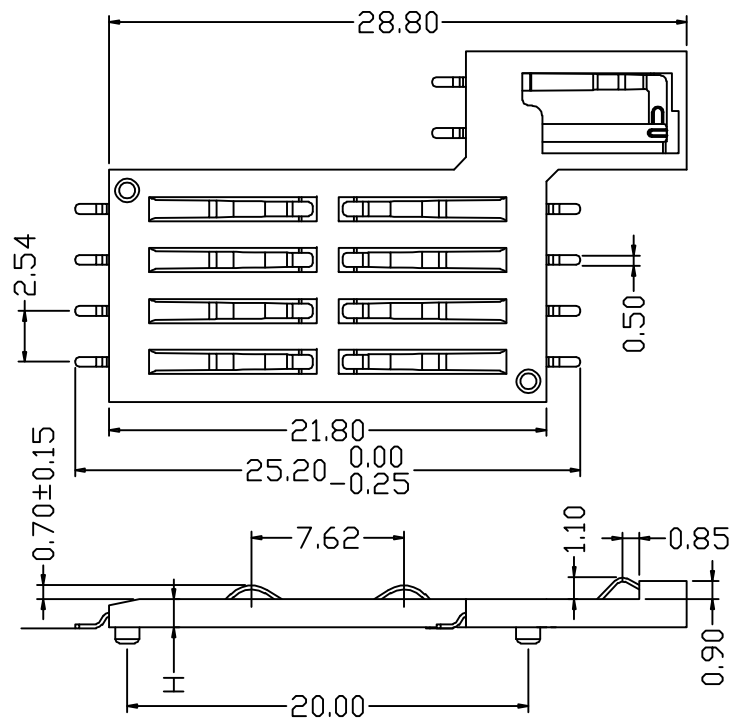

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X*± 5°	
.X± 0.30	.X*± 2°	
.XX± 0.20	.XX*± 1°	名 (TITLE) SMART CARD 右 H:1.4
單位(UNIT) mm	料號(PART NO.) 7SCCN-F0-0003	圖號(DWG NO.) 7SCCN-F0-0003
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)
		比例(SCALE) 1:1
		張數(SHEET) 1/1
		更改(REV) B