

更改 REV	设计变更 MODIFICATION
A	ECXXXX

NOTES :

1. MATERIAL :





- 1.1 HOUSING:LCP UL94 V-0, BLACK COLOR.
- 1.2 SHELL: STAINLESS STEEL
- 1.3 CONTACT: COPPER ALLOY

2. FINISH :

- 2.1 CONTACT: GOLD 3u" MIN PLATING ON CONTACT AREA,
GOLD FLASH ON SOLDERTAIL AREA.
50u" MIN NICKEL PLATING OVERALL.
- 2.2 SHELL: 30u" MIN SOLDERABLE NICKEL PLATING OVERALL.
GOLD FLASH ON SOLDERTAIL AREA.

3. ELECTRICAL CHARACTERISTICS:

- 3.1 OPERATING VOLTAGE : 100V AC(rms)/DC.
- 3.2 CURRENT RATING : 0.5 A.
- 3.3 OPERATING TEMPERATURE: -25'C~+85'C.
- 3.4 CONTACT RESISTANCE: 100 m OHMS MAX.
- 3.5 INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
- 3.6 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

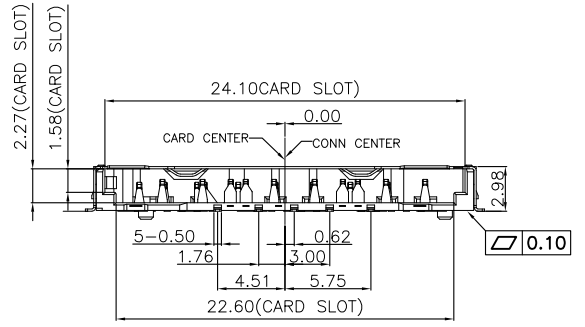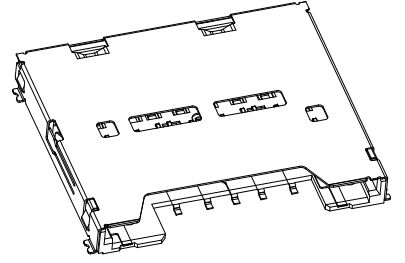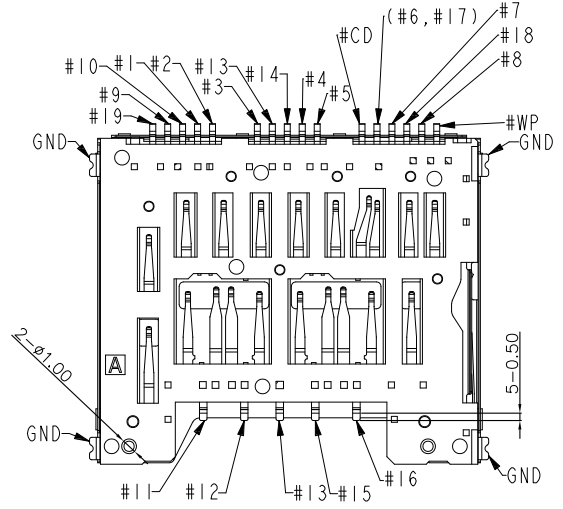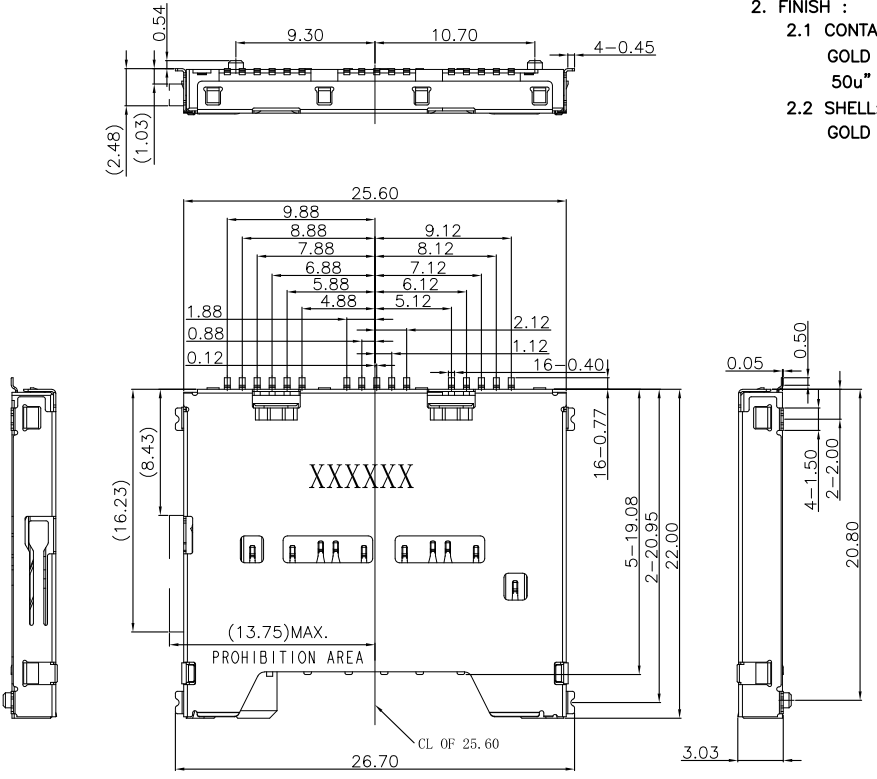

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司
X± 0.50	X*± 5°	
.X± 0.30	.X*± 2°	
.XX± 0.20	.XX*± 1°	名 稱(TITLE) SD8.0 Gen4X1 Push H:2.98mm
單位(UNIT) mm	料 號(PART NO.) 7SD80-F0-0003	圖 號(DWG NO.) 7SD80-F0-0003
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)
SCALE 1:1		張 數(SHEET) 1 / 2
PROJ.		更改 REV A



