

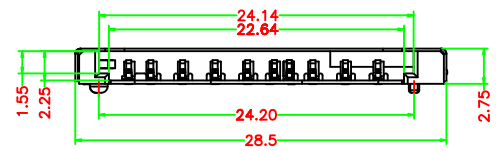
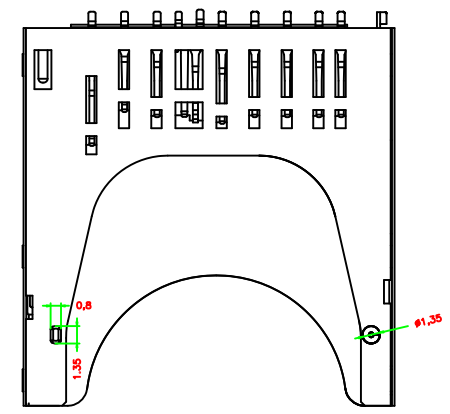

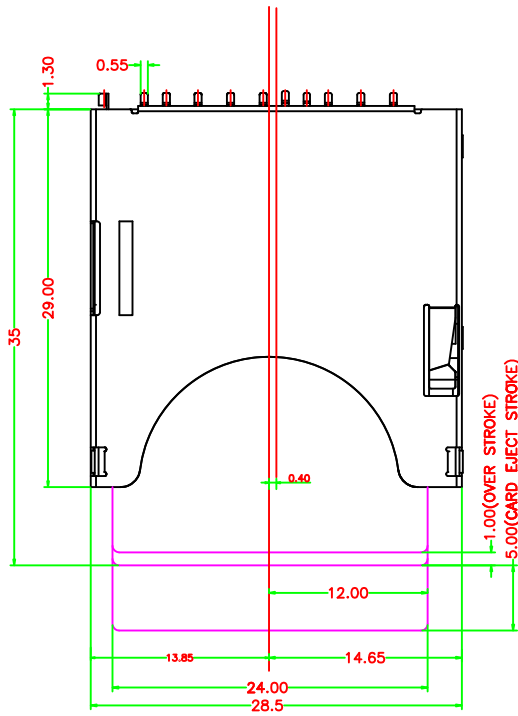



更改 REV	變更內容 MODIFICATION
A	ECXXXXX



SPECIFICATIONS:

- 1.Voltage : 100 Volts DC,AC(rms)100 Volts (per pin).
- 2.Current : 0.5 Amperes DC(per pin).
- 3.Operating Temperature : -25°C ~ 85°C.
- 4.Housing : LCP UL 94V-0, Black.
- 5.Contact : Copper alloy,Gold Flash Plated At Contact Area,  
Tin Plated At Soldered Area,Nickel Underplated Overall.
- 6.Shell : Stailless steel,Nickel plated on solder pad.

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名稱(TITLE) SD PUSH G/F	
.X± 0.30	.X*± 2°		
XX± 0.20	XX*± 1°		
單位(UNIT) mm	料號(PART NO.) 7SDCN-F0-0028	圖號(DWG NO.) 7SDCN-F0-0028	
審核(APPROVAL)	檢查(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1 / 2 更改 REV A



