



- NOTES :
- MATERIAL :
 - HOUSING:LCP S475 UL94 V-0, BLACK COLOR.
 - SHELL:STAINLESS STEEL SUS.
 - CONTACT: COPPER ALLOY.
 - FINISH :
 - CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN 80u"MIN ON SOLDER TAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
 - SHELL: 30U" MIN SOLDERABLE NICKEL PLATED OVER ALL. AU 1U" PLATING ON SOLDER TAIL.
 - ELECTRICAL CHARACTERISTICS:
 - OPERATING VOLTAGE : 100V AC(rms)/DC.
 - CURRENT RATING : 0.5 A.
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - CONTACT RESISTANCE: 100 m OHMS MAX.
 - INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

- NOTES:
- NO PATTERN AREA
 - LAND AREA
 - KEEP OUT AREA

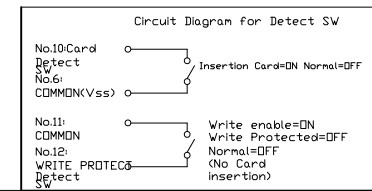

NO.	Name	Description
1	CD/DAT3	Card Detect /Data Line
2	CMD	Command / Response
3	VSS1	Supply voltage ground
4	VDD	Supply voltage
5	CLK	Clock
6	VSS2	Supply voltage ground
7	DAT0	Data Line
8	DAT1	Data Line
9	DAT2	Data Line



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X'± 5 °	名 稱(TITLED) SD CONN REVERSE H:2.95mm	
.X± 0.30	.X'± 2 °		
.XX± 0.20	.XX'± 1 °		
單位(UNIT) mm	料號(PART NO.) 7SDCN-F0-0033	圖號(DWG NO.) 7SDCN-F0-0033	
審核(APPROVAL)	檢核(CHECKED)	製圖(DRAWN)	比例(SCALE) 1:1
			張數(SHEET) 1/1
			更改(REV) A

