
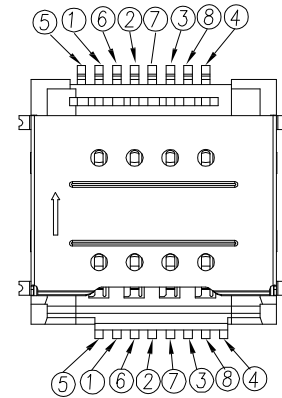
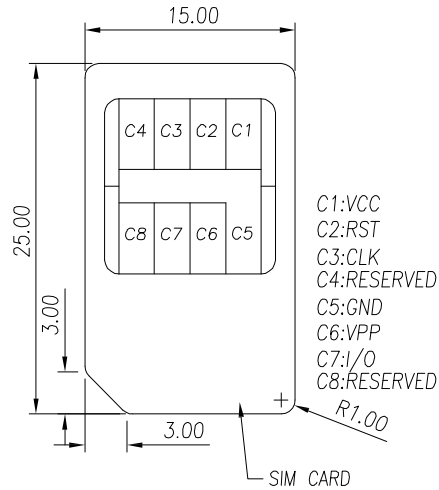



更改 REV	變更內容 MODIFICATION
A	ECXXXXX

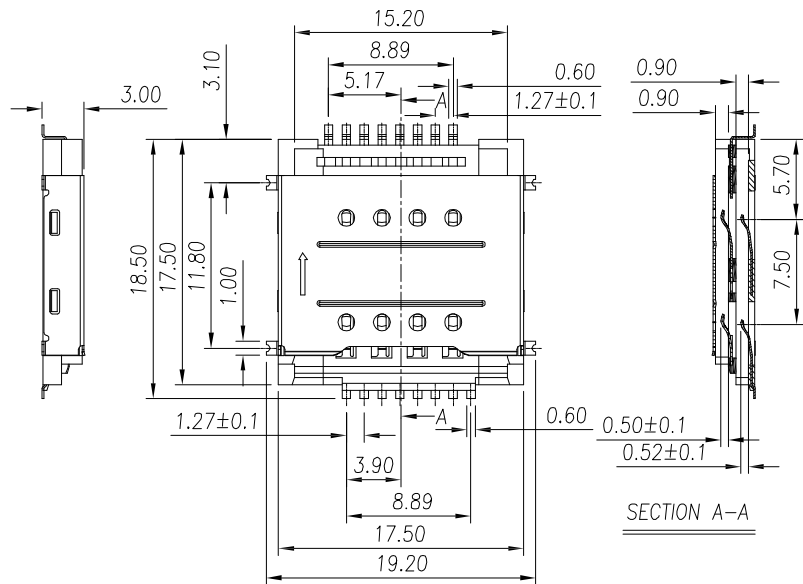


- C1:VCC
- C2:RST
- C3:CLK
- C4:RESERVED
- C5:GND
- C6:VPP
- C7:I/O
- C8:RESERVED

NOTES:

1. MATERIAL:
  - 1-1. HOUSING: THERMOPLASTIC 94V-0, COLOR: BLACK
  - 1-2. CONTACT: COPPER ALLOY T=0.15MM
  - 1-3. SHELL: STAINLESS STEEL T=0.15MM
2. FINISH:
  - 2-1. CONTACT: Au PLATING ON CONTACT 1μ" OR100μ" MATTE Sn PLATING ON SOLDER TAILS 80-120μ" NICKEL UNDERPLATING OVER ALL
  - 2-2. SHELL:G/F PLATING ON SOLDER TAILS 50μ" MIN. NICKEL UNDERPLATING OVER ALL
3. SPECIFICATIONS:
  - 3-1. VOLTAGE RATING:30V AC
  - 3-2. CURRENT RATING:0.5A MAX
  - 3-3. INSULATION RESISTANCE:100MEG. OHM MIN
  - 3-4. CONTACT RESISTANCE:40 MILL. OHM MAX
  - 3-5. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE
  - 3-6. OPERATION TEMPERATURE:-40° ~+80°
  - 3-7. DURABILITY: 3000 CYCLES
  - 3-8. NORMAL FORCE: 30~70gf AT THE WORKING POSITION

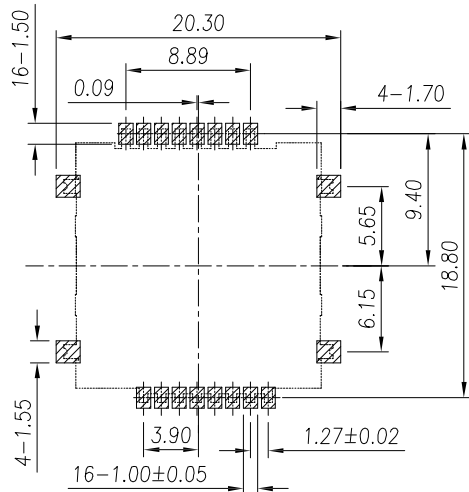

GENERAL TOLERANCE ± 0.05

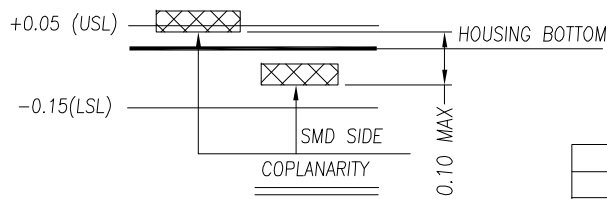

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名 稱(TITLE) 雙層SIM卡座3.0H	
.X± 0.30	.X*± 2°		
.XX± 0.20	.XX*± 1°		
單 位(UNIT) mm	料 號(PART NO) 7SIMC-FA-0003-A	圖 號(DWG NO) 7SIMC-FA-0003-A	
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1 圖 號 SHEET 1/1 圖 號 REV A