

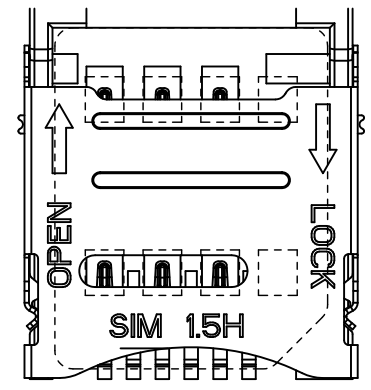
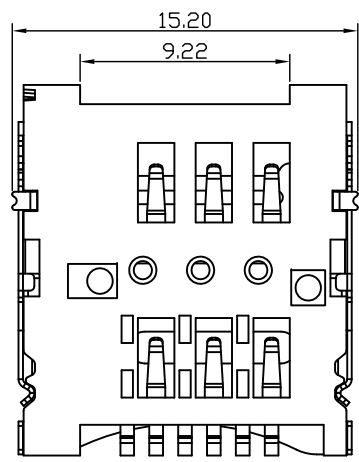

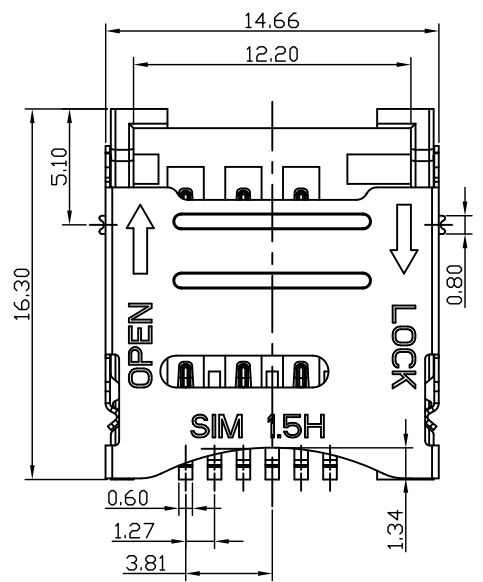

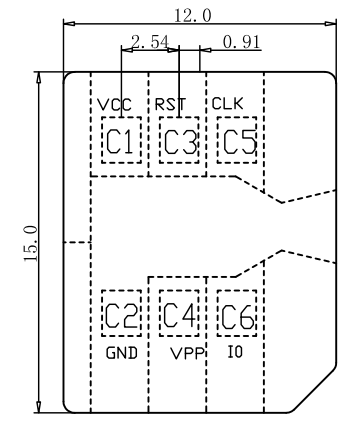


更改 REV	變更內容 MODIFICATION
A	ECXXXX

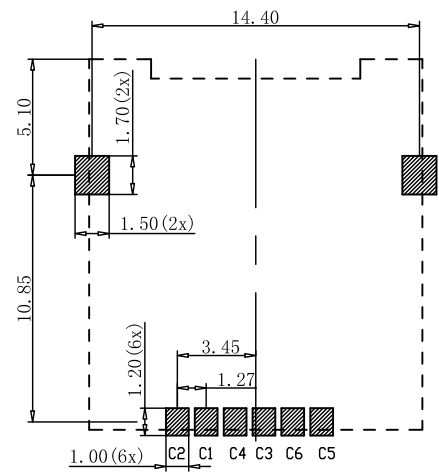

- 備註:
- 材質:
 - 1.1 膠芯: LCP UL94V-0
 - 1.2 端子: 磷銅, 半金錫, 霧錫100μ", 觸點鍍金1μ";
 - 1.3 接地腳: 不銹鋼, 霧錫100μ",
 - 1.3 外殼: SUS,
 - 主要特性:
 - 2.1 額定電流: 1.0A
 - 2.2 接觸阻抗: 50mΩ MAX
 - 2.3 絕緣阻抗: 100MΩ MIN 250V DC
 - 2.4 耐壓測試: 250V AC
 - 2.5 沾錫性: 溫度235±5℃, 時間5±0.5s
 - 2.6 使用壽命: 3000次
 - 2.7 耐溫性: 烤箱測試: 溫度250±5℃, 時間2分鐘
 - 2.8 工作環境: 溫度: -30℃~+80℃; 濕度: 80% MAX

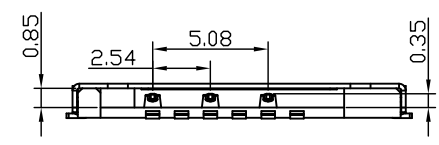

PCB LAYOUT

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I0

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名廠(TITLE) MICRO SIM 掀蓋式15H	
X± 0.30	X*± 2°		
.XX± 0.20	.XX*± 1°		
單位(UNIT)	料號(PART NO.)	圖號(DWG NO.)	
mm	7SIMC-FA-0004	7SIMC-FA-0004-A	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1/1
			更改 REV A

