
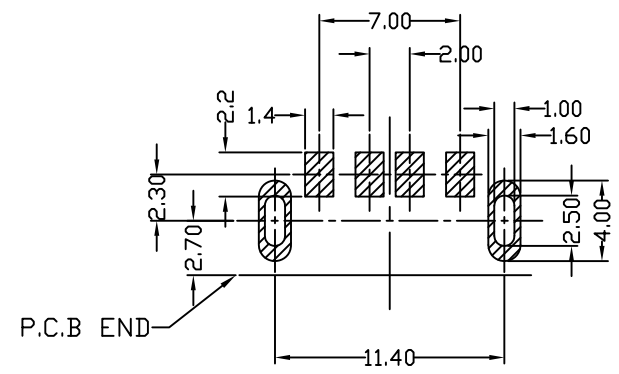

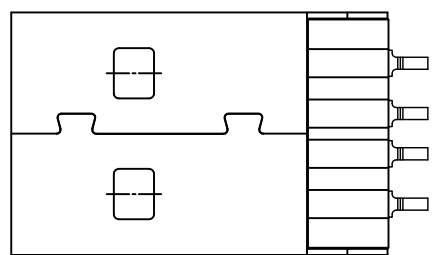


更改 REV	註 變 內 容
A	ECXXXXX

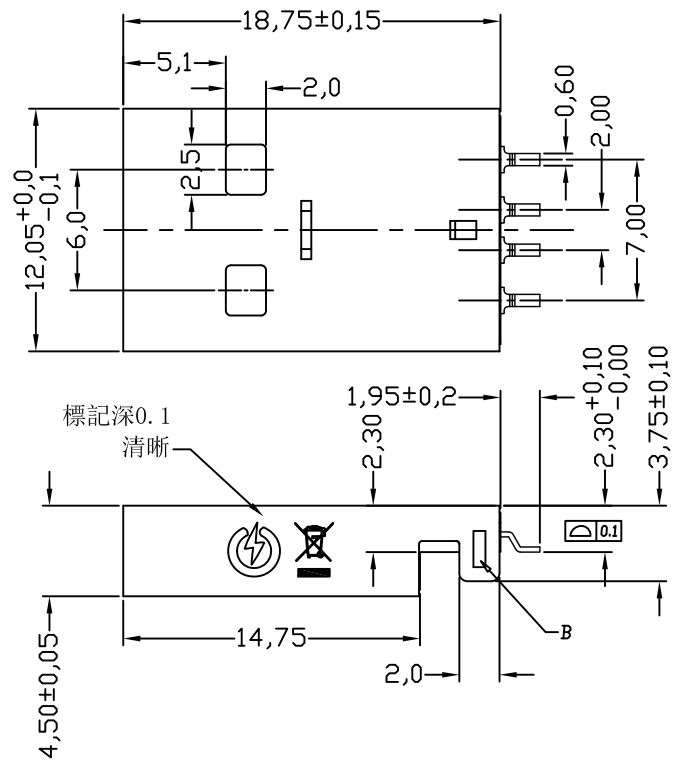

Recommend P. C. B Layout

- Specifications:
- 1.1 Current rating: 1 A Max.
 - 1.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 1.3 Contact resistance: 30mΩ Max.
 - 1.4 Insulation resistance: 1000MΩ Min at DC 500V
 - 1.5 Temperature range: -45℃~+85℃.

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名 稱(TITLE) USB AM 沉板無柱	
X± 0.30	X*± 2°		
.XX± 0.20	.XX*± 1°		
單 位(UNIT) mm	料 號(PART NO.) 7USB2-F0-0015	圖 號(DWG NO.) 7USB2-F0-0015-A	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1
			張 數 SHEET 1/1
			更 改 REV A

