
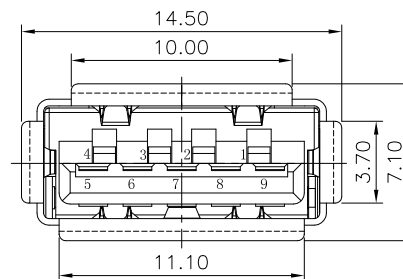


更改 REV	变更记录 MODIFICATION
A	ECXXXXX

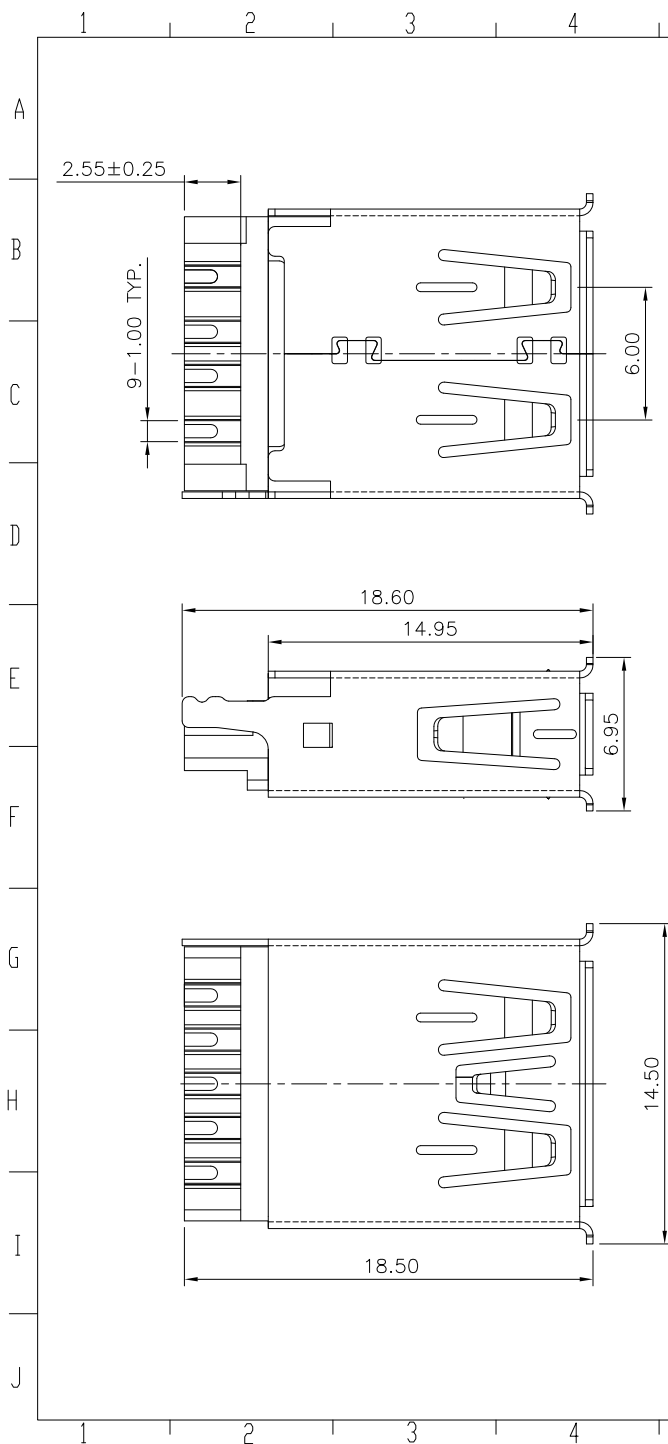

Note:

1.Material:

- 1.1 Insulator:PBT+30%G.F UL 94-V0 rated.
- 1.2 Contact:Brass,T=0.20mm.
- 1.3 Shell:Brass,T=0.30mm.

2.Specification:

- 2.1 Current rating:1A Max.
- 2.2 Dielectric withstanding voltage:500V(ac) for 1 minute.
- 2.3 Contact resistance:30 mΩ MAX.
- 2.4 Insulation resistance:1000 MΩ MIN at DC 500V.
- 2.5 Temperature rage: -55°C TO+105°C.
- 2.6 Total mating force:35 Newtoms MAX.
- 2.7 Total unmating force:10 Newtoms MIN.  
8Newtoms Min After Durability.

3.Finishes:

- 3.1 Contacts:Gold flashed 1u".
- 3.2 Shell:Nickel/Tin or gold plated.

3	HOUSING	1	PBT
2	TERMINAL	9	COPPER ALLOY
1	SHELL	1	COPPER ALLOY
NO.	TITLE	QTY	MATERIAL

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名 稱/TITLED USB3.0 FEMALE 焊線式	
.X± 0.30	.X*± 2°		
.XX± 0.20	.XX*± 1°		
單位(UNIT) mm	料 號(PART NO.) 7USB3-F0-0603	圖 號(DWG NO.) 7USB3-F0-0603	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1
		張 數 SHEET 1/1	
		更 改 REV A	

