



更改 REV	變更內容 MODIFICATION
A	ECXXXX


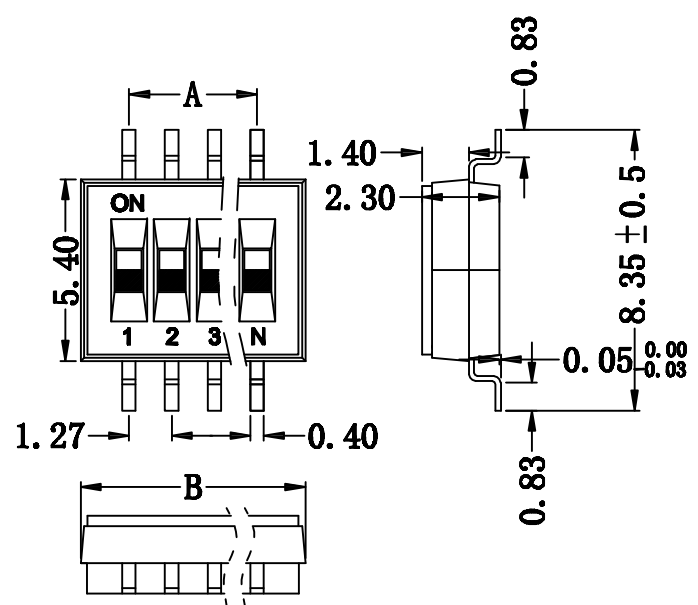


Schematic



- Notes:**
- Specations:**
- 1). Operating force: 1000gf Max
 - 2). operating temperature: -30° to +85°
 - 3). storage temperature: -40° to +85°
 - 4). Mechanical life: 3000cycles minimum

Constuction

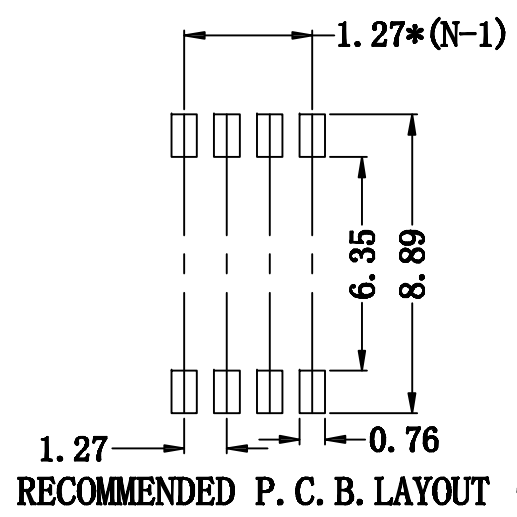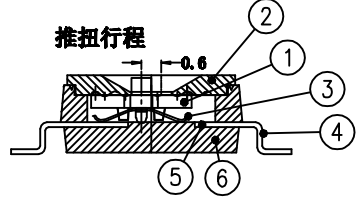

DIMENTIONS			DIMENTIONS		
POS.	A	B	POS.	A	B
/	/	/	2P	1.27	4.14
3P	2.54	5.41	4P	3.81	6.68
5P	5.08	7.95	6P	6.35	9.22
			8P	8.89	11.76
			10P	11.43	14.30

Number	Part Name	Material
①	Actuator	UL94 V0
②	Cover	UL94 V0
③	Movable	Copper Alloy
④	Terminal	Brass
⑤	Base	UL94 V0
⑥	Terminal contact	Brass



GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司
X ± 0.50	X* ± 5°		
.X ± 0.30	.X* ± 2°		
.XX ± 0.20	.XX* ± 1°	名 稱(TITLE)	指撥開關SMT
單位(UNIT)	料 號(PART NO)	圖 號(DWG NO)	
mm	7WHITE-F0-S028	7WHITE-F0-S028	
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比例 SCALE 1:1
			張數 SHEET 1/1
			更改 REV A