
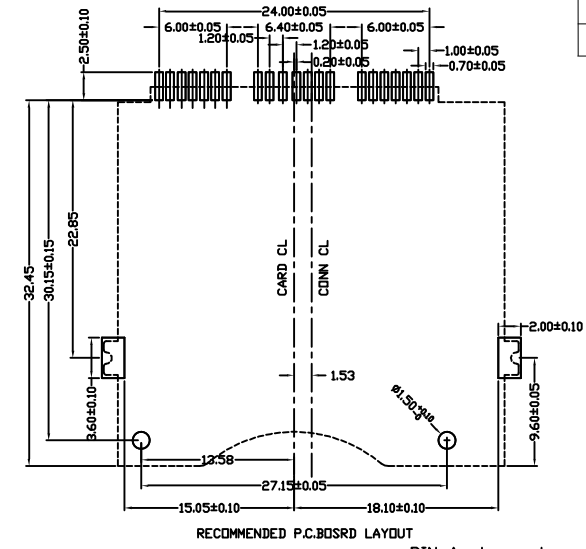
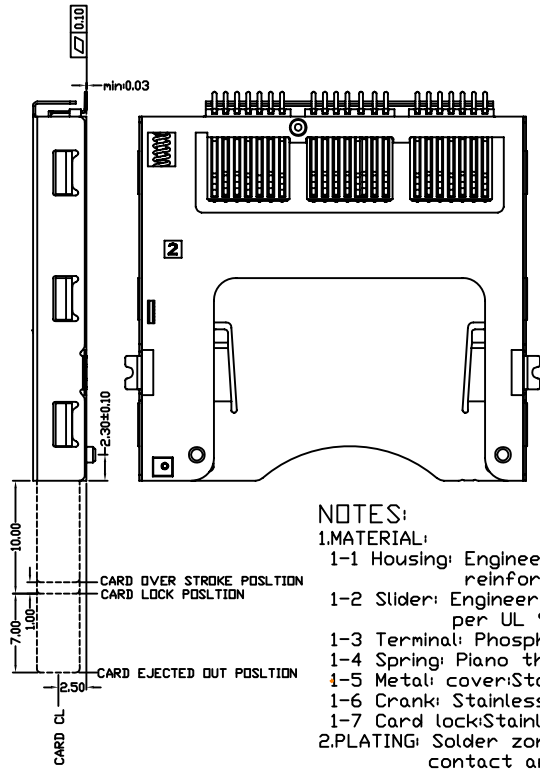


更改 REV	数量内容 MODIFICATION
A	EC06728
B	EC06827

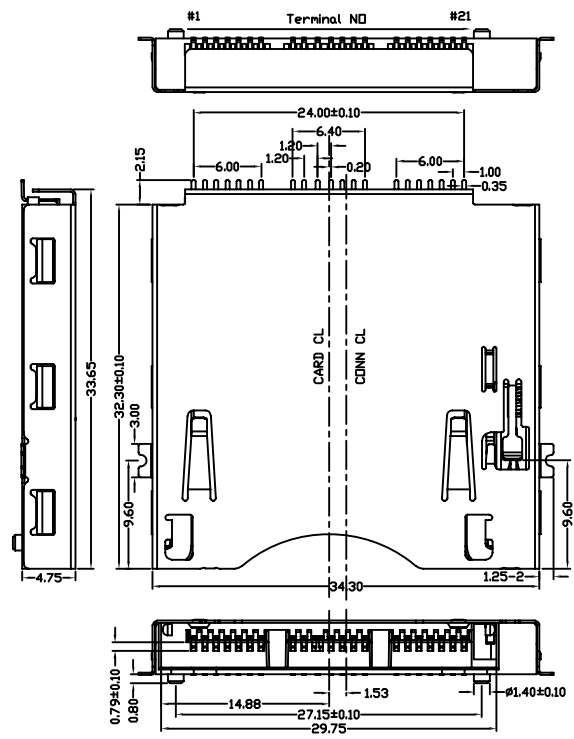


NOTES:

- 1.MATERIAL:**
 1-1 Housing: Engineering plastic,LCP with G.F reinforced,black per UL 94V-0 rate.
 1-2 Slider: Engineering plastic,LCP with G.F reinforced,black per UL 94V-0 rate.
 1-3 Terminal: Phosphor Bronze,per JIS 5191,0.2t.
 1-4 Spring: Piano thread.
 1-5 Metal cover:Stainless steel sheet SUS304,0.2t.
 1-6 Crank: Stainless rod SUS 304.
 1-7 Card lock:Stainless steel SUS304.
2.PLATING: Solder zone:0.381µm(15µ") gold plating in contact area,2.54µm(100µ")matte tin,1.27µm(50µ")min.Nickel underplating over all.
3.RoHS: compliant products.
4.OPERATING TEMPERATURE:-25~+85°C
5.ELECTRONICAL SPECIFICATION:
 CURRENT:DC 0.5A
 VOLTAGE:DC 5V
 D.W.VOLTAGE:AC 500Vrms/min.

PIN Assignment

PIN NO.	Signal
1	GND
2	PERn1
3	PERp1
4	GND
5	PETn1
6	PETp1
7	Reserved
8	Reserved
9	PERST#
10	+3.3V
11	CLKREQ#
12	INS#
13	PEFCLK-
14	PEFCLK+
15	GND
16	PERn0
17	PERp0
18	GND
19	PETn0
20	PETp0
21	GND

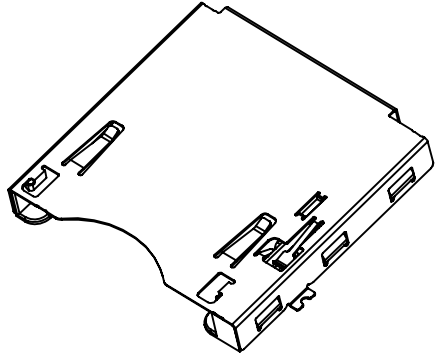

GENERAL TOLERANCE	
X± 0.50	X°± 5°
.X± 0.30	.X°± 2°
.XX± 0.20	.XX°± 1°

KINGCONN 皇海科技股份有限公司
 名称(TITLE) XQD PUSH 15u'

单位(UNIT) mm	料号(PART NO.) 7XQDP-C0-0001	图号(DWG NO.) 7XQDP-C0-0001
审核(APPROVAL)	核数(CHECKED)	数量(SHEET) 1/1
	製圖(DRAWN)	更改(REV) B

