






更改 REV	變更內容 MODIFICATION
A	ECXXXXX

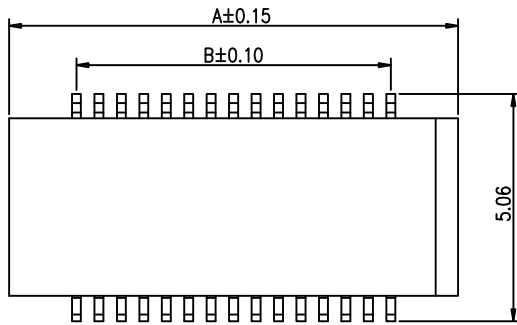

3D VIEW

NOTES:

- HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- TERMINAL:BRASS BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

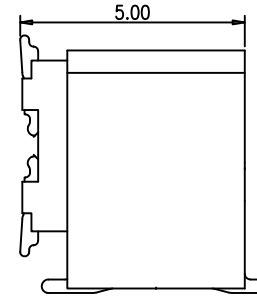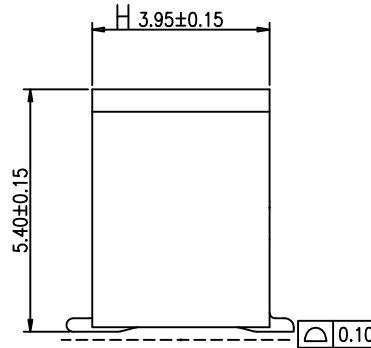
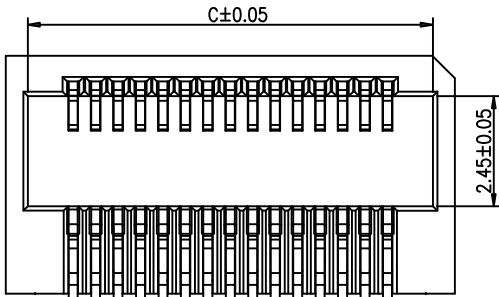


MATING HEIGHT:5.0mm

7BTBF-F0-0539554XX

PIN NO.(EX:10/12/80...)

NO.of contacts	Dimensions		
	A.	B.	C.
10	5.00	2.00	4.02
12	5.50	2.50	4.52
14	6.00	3.00	5.02
16	6.50	3.50	5.52
18	7.00	4.00	6.02
20	7.50	4.50	6.52
22	8.00	5.00	7.02
24	8.50	5.50	7.52
30	10.00	7.00	9.02
40	12.50	9.50	11.52
50	15.00	12.00	14.02
60	17.50	14.50	16.52
80	22.50	19.50	21.52

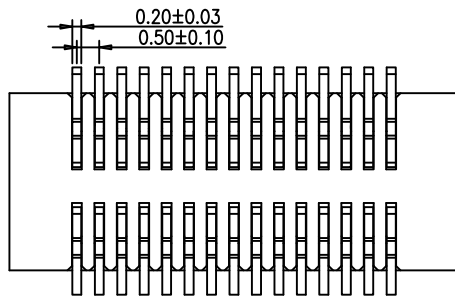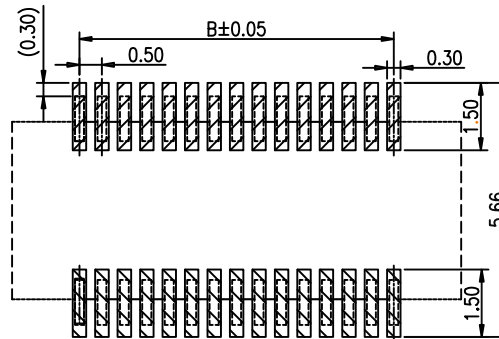

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

GENERAL TOLERANCE	
X± 0.50	X*± 5 °
.X± 0.30	.X*± 2 °
.XX± 0.20	.XX*± 1 °

KINGCONN 皇海科技股份有限公司
名 (TITLE) BTB FEMALE 側插PH:0.5mm

單位(UNIT) mm	料號(PART NO.) 7BTBF-F0-0539554XX	圖號(DWG NO.) 7BTBF-F0-0539554XX
審核(APPROVAL)	檢核(CHECKED)	製圖(DRAWN)
比例 SCALE 1:1		張數 SHEET 1/1
備註 PROJ.		更改 REV A

